
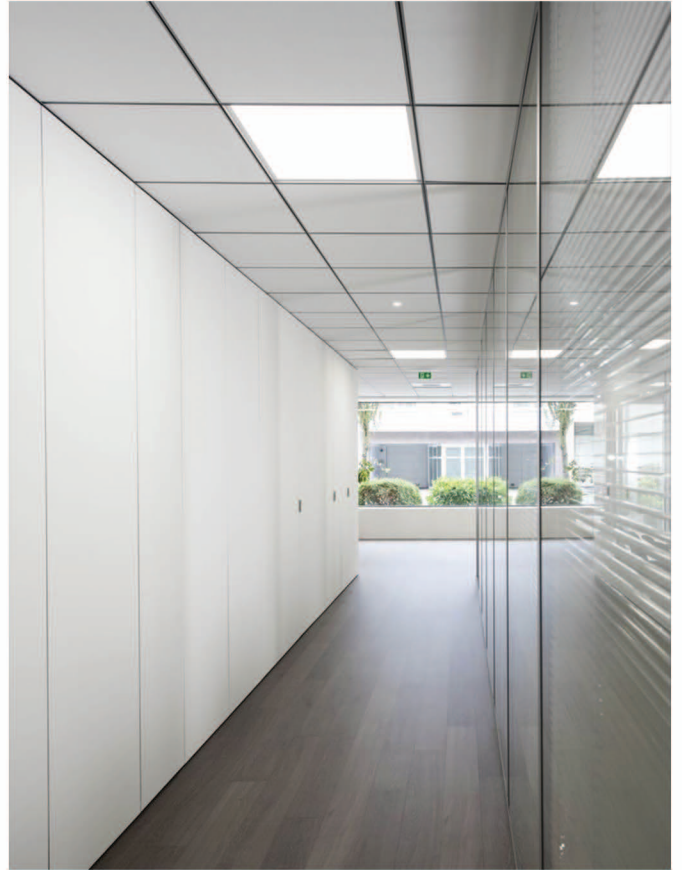


PANEL 60x60
2022

Aftabbaahar

PANEL SURFACE MOUNTED LIGHTING FAMILY

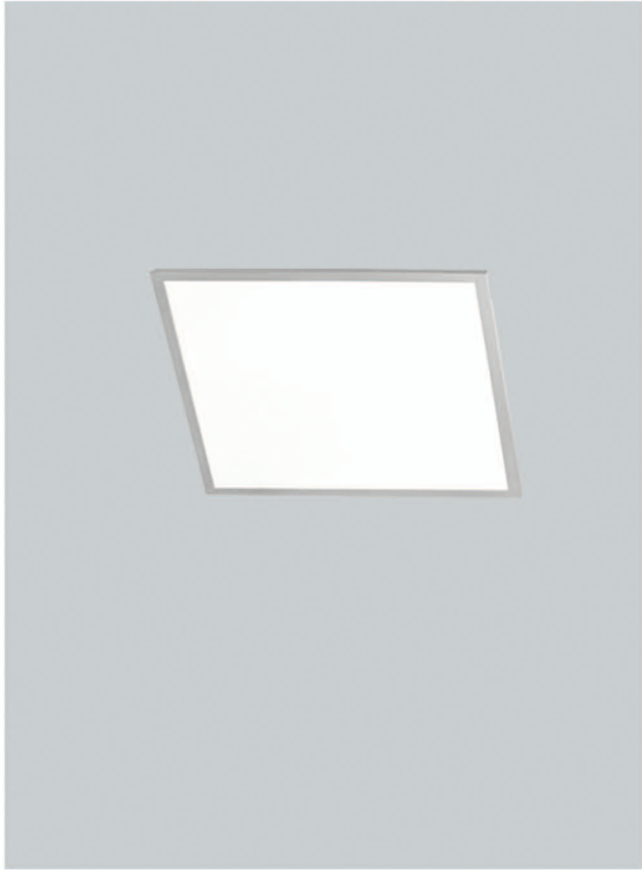

PNLS 600x600

LED_Panel family	-	-			T _a 25	5				
------------------	---	---	--	--	-------------------	---	--	--	--	--

THE FAMILY OF RECESSED BACK LIGHT LED PANEL OPERATING AT **48W**, 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF **5280LM**.

Technical description



LED panel lights are a type of lighting fixture designed to replace conventional fluorescent ceiling lights. A Recessed LED luminaire, flat direct LED with PS diffuser ceiling illumination. (IP42 just for options). The body material is made of an extruded white steel sheet. For 600 x 600 mm square baffle ceiling. Total power: 48 w, slave luminaire for DALI control (an option only). Luminaire luminous flux: 5280 lm, Luminaire efficacy: 110 lm/w. Color temperature is 3000-6000 kelvin. Color rendering index: Ra > 80, Color tolerance: MacAdam 3

Power is customized according to customer requirements: 35, 42, 48w



Application

- Office
- Education
- Exhibition
- Hospital

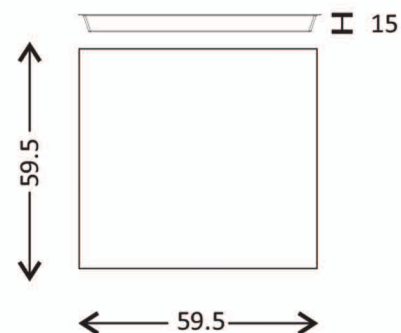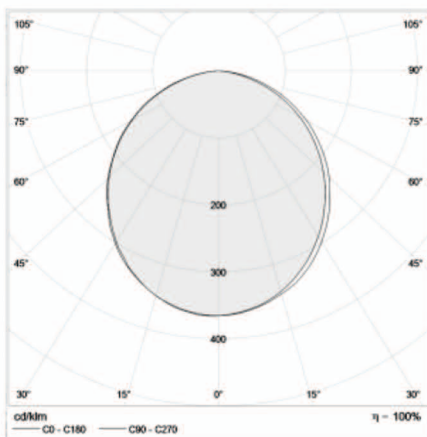

Correlated color temperature: 3000 - 6000 kelvin
 Rated median useful life: 50000h L70 at 25°C Luminaire
 input power: 48 w

Dimensions: 59.5 x 59.5 x 15 mm
 Total power: 48 w
 Luminaire luminous flux: 5280 lm
 Luminaire efficacy: 110 lm/w
 Weight: 2.5 kg

Mounting and installation

Recessed installation with springs for plasterboard false ceilings. The cut of this lamp is 575mm.

Options:





aftabbahar

lighting industries co.

شرکت صنایع روشنایی آفتاب بهار

@aftabbahar_lighting

www.aftabbahar.com

